

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C10L 1/32	A1	(11) International Publication Number: WO 99/13031 (43) International Publication Date: 18 March 1999 (18.03.99)
(21) International Application Number: PCT/US98/18997 (22) International Filing Date: 11 September 1998 (11.09.98) (30) Priority Data: 08/928,239 12 September 1997 (12.09.97) US (71) Applicant: EXXON RESEARCH AND ENGINEERING COMPANY [US/US]; 180 Park Avenue, P.O. Box 390, Florham Park, NJ 07932-0390 (US). (72) Inventors: BERLOWITZ, Paul, Joseph; 939 Jamestown Road, East Windsor, NJ 08520 (US). WITTENBRINK, Robert, Jay; 836 Shadyglen Drive, Baton Rouge, LA 70816 (US). (74) Agent: SIMON, Jay; Exxon Research and Engineering Company, P.O. Box 390, Florham Park, NJ 07932-0390 (US).		(81) Designated States: AU, BR, CA, JP, MX, NO, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: EMULSION BLENDS (57) Abstract Emulsion blends are provided containing Fischer-Tropsch hydrocarbons, non-Fischer-Tropsch hydrocarbons, water, and a surfactant.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

EMULSION BLENDS

FIELD OF THE INVENTION

This invention relates to emulsions comprising Fischer-Tropsch derived liquids and hydrocarbon liquids other than Fischer-Tropsch liquids, e.g., petroleum liquids, and water.

BACKGROUND OF THE INVENTION

Hydrocarbon in water emulsions are well known and have a variety of uses, e.g., as fuels for power plants or internal combustion engines. These emulsions are generally described as macro-emulsions, that is, where the emulsion is cloudy or opaque as compared to micro-emulsions that are essentially clear, translucent, and more thermodynamically stable than macro-emulsions, the micro-emulsions having a higher level of surfactant.

While aqueous fuel emulsions are known to reduce pollutants when burned as fuels, the methods for preparing emulsions and the materials used therein, e.g., surfactants and co-solvents, such as alcohols, can be expensive. Also, the thermodynamic stability of macro-emulsions is relatively weak, particularly when low levels of surfactants are used in preparing the emulsions.

Consequently, there is a need for stable macro-emulsions that employ less surfactants or co-solvents, and use less costly materials in preparing hydrocarbon in water emulsions. Additionally, by virtue of the invention described herein, distillate fuel emulsions of conventional petroleum fuels can be upgraded, for example, to higher cetane index, by blending with Fischer-Tropsch derived hydrocarbon liquids, e.g., distillates.

For purposes of this invention, the stability of macro-emulsions is determined generally as the degree of separation occurring during a twenty-four hour period, usually the first twenty-four hour period after forming the emulsions.

SUMMARY OF THE INVENTION

In accordance with this invention, a distillate emulsion is provided which comprises water, a Fischer-Tropsch hydrocarbon, a hydrocarbon other than a Fischer-Tropsch hydrocarbon, and a surfactant where the amount of surfactant employed is less than or equal to, preferably less than, the amount of surfactant required to emulsify either hydrocarbon by itself. Thus, a synergistic effect occurs when non-Fischer-Tropsch hydrocarbon distillates are emulsified with water in the presence of Fischer-Tropsch hydrocarbon distillates.

BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a plot of the minimum amount of surfactant required (ordinate) to emulsify blends of Fischer-Tropsch distillates and conventional petroleum distillates (abscissa).

PREFERRED EMBODIMENTS

By virtue of this invention, relatively stable, macro-emulsions are prepared in the substantial absence, e.g., ≤ 1.0 wt % or complete absence of the addition of a co-solvent, e.g., alcohols, and preferably in the substantial absence of co-solvent. Thus, Fischer-Tropsch liquids may contain trace amounts of oxygenates, including alcohols, these oxygenates being lower in concentration in the emulsions than would be present if an alcohol or other oxygen containing co-solvent was added to the emulsion. Generally, the alcohol content of the Fischer-Tropsch liquids is nil in the sense of not being

measurable, and is generally less than about 1 wt% based on the liquids, more preferably less than about 0.1 wt% based on the liquid.

The Fischer-Tropsch liquids used in this invention are those hydrocarbons that are liquid at room temperature. Thus, these materials may be the raw liquids from the Fischer-Tropsch hydrocarbon synthesis reactor, such as C₄+ liquids, preferably C₃+ liquids, more preferably C₃ - C₁₇ hydrocarbon containing liquids, or hydroisomerized Fischer-Tropsch liquids such as C₃+ liquids. These materials generally containing at least about 90 wt% paraffins, normal or isoparaffins, preferably at least about 95 wt% paraffins, and more preferably at least about 98 wt% paraffins.

The Fischer-Tropsch hydrocarbons may be further characterized as fuels: for example, naphthas, e.g. boiling in the range C₄ to about 320°F, preferably C₅ - 320°F, water emulsions of which may be used as power plant fuels; transportation fuels, jet fuels, e.g., boiling in the range of about 250 - 575°F, preferably 300 - 550°F, and diesel fuels, e.g., boiling in the range of about 320 - 700°F. Other liquids derived from Fischer-Tropsch materials and having higher boiling points are also included in the materials used in this invention.

The non-Fischer-Tropsch hydrocarbons can be obtained from a variety of sources, e.g., petroleum, shale liquids (kerogen), tar sand liquids (bitumen), or coal liquids. Preferred materials are petroleum derived hydrocarbons boiling in the same ranges as described for the Fischer-Tropsch hydrocarbon containing liquids.

Generally, the emulsions contain less than 100 wt% of either Fischer-Tropsch hydrocarbon containing liquids or non-Fischer-Tropsch hydrocarbons containing liquids. Preferably, however, the Fischer-Tropsch liquids are present in amounts of about 10-90 wt% of the total hydrocarbons, more preferably at least about 20 wt% Fischer-Tropsch liquids, still more preferably 25-75 wt%, and still more preferably 40-60 wt% Fischer-Tropsch liquids.

- 4 -

The amounts of water and totally hydrocarbons in the emulsions can also vary over a wide range, for example, 90/10 hydrocarbon/water to 10/90 hydrocarbon/ water. Preferably, however, the hydrocarbon content will be greater than about 50 wt%, preferably greater than about 60 wt%, more preferably 60-85 wt%.

While any kind of water may be used, the water obtained from the Fischer-Tropsch process, e.g.,



is particularly preferred, the process water from a non-shifting process.

A generic composition of Fischer-Tropsch process water, in which oxygenates are preferably ≤ 2.0 wt%, more preferably less than 1 wt% and useful for preparing hydrocarbon emulsions is shown below:

C ₁ -C ₁₂ alcohols	0.05 -2 wt%, preferably 0.05 - 1.2 wt%
C ₂ -C ₆ acids	0-50 wppm
C ₂ -C ₆ Ketones, aldehydes	
acetates	0-50 wppm
other oxygenates	0-500 wppm

Fischer-Tropsch derived materials usually contain few unsaturates, e.g., ≤ 1 wt%, olefins and aromatics, preferably less than about 0.5 wt% total aromatics, and nil-sulfur and nitrogen, i.e., less than about 50 ppm by weight sulfur or nitrogen. Hydrotreated Fischer-Tropsch liquids may also be used which contain virtually zero or only trace amounts of oxygenates, olefins, aromatics, sulfur, and nitrogen.

The non-ionic surfactant is usually employed in amounts equal to or lower than that required for emulsifying petroleum derived liquids. Thus, the surfactant concentration used is sufficient to allow the formation of the macro, relatively stable

- 5 -

emulsion. Preferably, the amount of surfactant employed is at least about 0.001 wt% of the total emulsion, more preferably at least about 0.01 wt%, still more preferably about 0.05 to about 5 wt%, and still more preferably 0.05 to less than 3 wt%, and most preferably 0.05 to less than about 3 wt%, and most preferably 0.05 to less than about 2 wt%.

Typically, surfactants useful in preparing the emulsions of this invention are non-ionic and are non-ionic and are those used in preparing emulsions of petroleum derived or bitumen derived materials, and are well known to those skilled in the art. These surfactants usually have a HLB of about 7-25, preferably 9-15. Useful surfactants for this invention include ethoxylated alkylphenols with 5 - 30 moles of ethyleneoxide per molecule, linear alcohol ethoxylates, ethoxylated octylphenol, fatty alcohol ethoxylates, ethoxylated stearic acid, stearyl alcohol ethoxylates, ethoxylated dialkyl phenol, and alkyl glycosides, preferably ethoxylated alkyl phenols, and more preferably ethoxylated nonylphenols with about 8-15 ethylene oxide units per molecule. A particularly preferred emulsifier is an alkyl phenoxy polyalcohol, e.g., nonyl phenoxy poly (ethyleneoxy ethanol), commercially available from several sources, including the trade name Igepol.

The use of water-fuel emulsions significantly improves characteristics of the fuels and particularly so in respect of the materials of this invention where Fischer-Tropsch water emulsions have better emission characteristics than petroleum derived emulsions, i.e., in regard to particulate emissions and NO_x.

The emulsions of this invention are formed by conventional emulsion technology, that is, subjecting a mixture of the hydrocarbon, water and surfactant to sufficient shearing, as in a commercial blender or its equivalent for a period of time sufficient for forming the emulsions, e.g., generally a few seconds. For emulsion information, see generally, "Colloidal Systems and Interfaces", S. Ross and I. D. Morrison, J. W. Wiley, NY, 1988.

- 6 -

The Fischer-Tropsch process is well known in these skilled in the art, see for example, U.S. Patent Nos. 5,348,982 and 5,545,674 incorporated herein by reference and typically involves the reaction of hydrogen and carbon monoxide in a molar ratio of about 0.5/1 to 4/1, preferably 1.5/1 to 2.5/1, a temperatures of about 175-400°C, preferably about 180 - 240°C, a pressures of 1-100 bar, preferably about 10-50 bar, in the presence of a Fischer-Tropsch catalyst, generally a supported or unsupported Group VIII, non-noble metal, e.g., Fe, Ni, Ru, Co and with or without a promoter, e.g. ruthenium, rhenium, hafnium, zirconium, titanium. Supports, when used, can be refractory metal oxides such as Group IVB, i.e., titania, zirconia, or silica, alumina, or silica-alumina. A preferred catalyst comprises a non-shifting catalyst, e.g., cobalt or ruthenium, preferably cobalt, with rhenium or zirconium as a promoter, preferably cobalt/rhenium supported on alumina, silica or titania, preferably titania. The Fischer-Tropsch liquids, i.e., C₅+, preferably C₁₀+, are recovered and light gases, e.g., unreacted hydrogen and CO, C₁ to C₃ or C₄ and water are separated from the hydrocarbons.

Hydroisomerization conditions for Fischer-Tropsch derived hydrocarbons are well known to those skilled in the art. Generally, the conditions include:

CONDITION	BROAD	PREFERRED
Temperature, °F	300-900 (149 - 482°C)	550-750 (288-399°C)
Total pressure, psig	300-2500	300-1500
Hydrogen Treat Rate, SCF/B	500-5000	2000-4000

Hydrocarbon consumption is a result of conditions.

Catalysts useful in hydroisomerization are typically bifunctional in nature containing an acid function as well a hydrogenation component. A hydrocracking suppressant may also be added. The hydrocracking suppressant may be either a Group IB metal, e.g., preferably copper, in amounts of about 0.1-10 wt%, or a source of

- 7 -

sulfur, or both. The source of sulfur can be provided by presulfiding the catalyst by known methods, for example, by treatment with hydrogen sulfide until breakthrough occurs.

The hydrogenation component may be Group VIII metal, either noble or non-noble metal. The preferred non-noble metals can include nickel, cobalt, or iron, preferably nickel or cobalt, more preferably cobalt. The Group VIII metal is usually present in catalytically effective amounts, that is, ranging from 0.1 to 20 wt%. Preferably, a Group VI metal is incorporated into the catalyst, e.g., molybdenum, in amounts of about 1-20 wt%.

The acid functionality can be furnished by a support with which the catalytic metal or metals can be composited by well known methods. The support can be any refractory oxide or mixture of refractory oxides or zeolites or mixtures thereof. Preferred supports include silica, alumina, silica-alumina-phosphates, titania, zirconia, vanadia and other Group III, IV, V or VI oxides, as well as Y sieves, such as ultra stable Y sieves. Preferred supports include silica-alumina where the silica concentration of the bulk support is less than about 50 wt%, preferably less than about 35%, more preferably 15-30 wt%. When alumina is used as the support, small amounts of chlorine or fluorine may be incorporated into the support to provide the acid functionality.

A preferred support catalyst has surface areas in the range of about 180-440 m²/gm, preferably 230-350 m²/gm, a bulk density of about 0.5-1.0 g/ml, and a side crushing strength of about 0.8 to 3.5 kg/mm.

The preparation of preferred amorphous silica-alumina microspheres for use as supports is described in Ryland, Lloyd B., Tamele, M. W., and Wilson, J. N., *Cracking Catalysts, Catalysis; Volume VII*, Ed. Paul H. Emmett, Reinhold Publishing Corporation, New York, 1960.

- 8 -

During hydroisomerization, the 700°F+ conversion to 700°F-ranges from about 20-80%, preferably 30-70%, more preferably about 40-60%, and essentially all olefins and oxygenated products are hydrogenated.

The catalysts can be prepared by any well known method, e.g., impregnation with an aqueous salt, incipient wetness technique, followed by drying at about 125-150°C for 1-24 hours, calcination at about 300-500°C for about 1-6 hours, reduction by treatment with a hydrogen or a hydrogen containing gas, and, if desired, sulfiding by treatment with a sulfur containing gas, e.g., H₂S at elevated temperatures. The catalysts will then have about 0.01 to 10 wt% sulfur. The metals can be composited or added to the catalyst either serially, in any order, or by co-impregnation of two or more metals.

To exemplify this invention several emulsions blends were prepared at room temperature, although preparation temperatures may range from about 10-100°C, preferably 15-30°C.

The surfactant was first mixed with water and blended in a Waring blender for 5 seconds. Then the hydrocarbon was added and blended for one (1) minute. If an emulsion did not form, blending was continued in one (1) minute sequences, checking for an emulsion after each minute. If an emulsion did not form after a total of five (5) minutes blending time, emulsification was not successful.

We used the following conditions:

Surfactant: Igepol CO-630 (Rhône-Poulenc); ethoxylated nonylphenol with 9 moles EO

Water: Hydrocarbon ratio: 30/70

Blend amount: 200 ml

Water type: tap water

- 9 -

Hydrocarbons: Fischer-Tropsch diesel (250-700° F boiling range) described below and a conventional, petroleum derived European summer grade diesel fuel. The Fischer-Tropsch diesel was prepared by converting hydrogen and carbon monoxide ($H_2:CO$ 2.11-2.16) to heavy paraffins in a slurry Fischer-Tropsch reactor with a titania supported cobalt/rhenium catalyst described in U.S. Patent No. 4,568,663. The reaction conditions were about 425°F and 288 psig and a linear gas velocity of 17.5 cm/sec. The alpha was 0.92. The Fischer-Tropsch wax which was predominantly 500°F+ was hydroisomerized in a flow through fixed bed unit using a cobalt and molybdenum amorphous silica-alumina catalyst as described in U.S. 5,292,989 and U.S. 5,378,348. Hydroisomerization conditions included 708°F, 750 psig H_2 2500 SCF/B H_2 and a liquid hourly space velocity (LHSV) of 0.7 - 0.8. Hydroisomerization was conducted with recycle of 700°F reactor wax. The combined feed ratio (Fresh Feed + Recycle Feed)/Fresh Feed was 1:5. The product was then fractionated and a nominal 320-700°F cut diesel was recovered. This product contained nil sulfur, nitrogen, aromatics, oxygen (ates), and unsaturates and is essentially 100% paraffinic.

Eleven tests were prepared with Tests 1 and 11 being 100% petroleum derived diesel and 100% Fischer-Tropsch derived diesel, respectively, shown in Table I below.

- 10 -

Table I

Test #	Petroleum Derived Diesel	Fischer-Tropsch Diesel	Surfactant
1	0	100	0.3
2	25	75	0.25
3	25	75	0.3
4	40	60	0.2
5	50	50	0.15
6	50	50	0.1
7	60	40	0.3
8	75	25	0.35
9	75	25	0.3
10	90	10	0.3
11	100	0	0.75

This data is plotted and shown graphically in Figure 1. From the graph, it is clear that the minimum surfactant concentration for emulsifying 100% petroleum derived diesel was 0.75 wt%, while the minimum surfactant required for emulsifying 100% Fischer-Tropsch hydrocarbons was 0.3%. The table and Figure 1 show clearly that no more than 0.3 wt% surfactant was required to emulsify any combination of petroleum derived and Fischer-Tropsch derived hydrocarbons. Nevertheless, for the surfactant required to emulsify either hydrocarbon, we could expect the required amount of surfactant to emulsify any mixture of the two hydrocarbons to fall on or around the dotted line.

CLAIMS:

1. An emulsion comprising
 - Fischer-Tropsch derived hydrocarbon liquid
 - non-Fischer-Tropsch derived hydrocarbon liquid
 - water
 - an amount of surfactant less than or equal to the amount required to emulsify either liquid by itself.
2. The emulsion of claim 1, wherein the emulsion contains 60 wt% or less non-Fischer-Tropsch derived distillates.
3. The emulsion of claim 2 which comprises 10-90 wt% hydrocarbons.
4. The emulsion of claim 2 wherein the surfactant level is at least 0.01 wt%.
5. The emulsion of claim 2 wherein the surfactant level is about 0.05-3 wt%.
6. The emulsion of claim 1 wherein the Fischer-Tropsch derived liquid boils in the range of C₄-700°F.
7. The emulsion of claim 6 wherein the Fischer-Tropsch derived liquid is a diesel fuel or diesel fuel additive.
8. The emulsion of claim 1 wherein the non-Fischer-Tropsch derived liquid is derived from petroleum.

- 12 -

9. The emulsion of claim 8 wherein the petroleum derived liquid is a diesel fuel.

10. The emulsion of claim 2 wherein the water is Fischer-Tropsch process water.

1/1

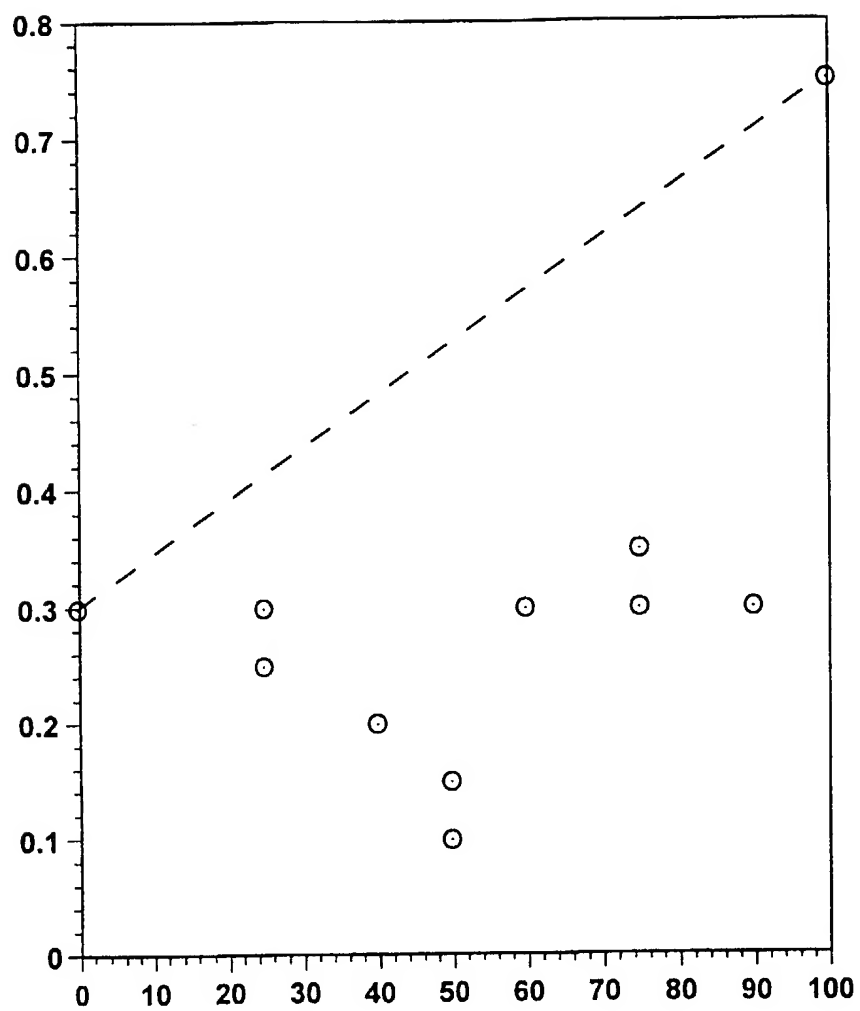


FIG. 1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/18997

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C10L1/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 209 758 A (HUELS CHEMISCHE WERKE AG) 28 January 1987 ----	
A	EP 0 363 300 A (OCCIDENTAL PETROLEUM CANADA) 11 April 1990 ----	
A	US 5 545 674 A (MAULDIN CHARLES H ET AL) 13 August 1996 cited in the application -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

*** Special categories of cited documents :**

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 January 1999

Date of mailing of the international search report

25/01/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Herdt, 0

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. J. Application No

PCT/US 98/18997

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0209758 A	28-01-1987	DE 3525124 A JP 62015292 A US 4732576 A	15-01-1987 23-01-1987 22-03-1988
EP 0363300 A	11-04-1990	US 5000872 A US 4966235 A US 5263848 A US 5110443 A US 5083613 A CA 1336155 A CN 1040155 A MX 169284 B US 5283001 A US 5340467 A US 5316664 A	19-03-1991 30-10-1990 23-11-1993 05-05-1992 28-01-1992 04-07-1995 07-03-1990 28-06-1993 01-02-1994 23-08-1994 31-05-1992
US 5545674 A	13-08-1996	AU 589806 B AU 7930687 A CA 1312066 A DE 3750154 D DE 3750154 T EP 0266898 A JP 2572079 B JP 63147545 A NO 178611 B AU 623756 B AU 5220890 A CA 2012682 A EP 0453674 A US 4962078 A US 4977126 A US 5128377 A	19-10-1989 14-04-1988 29-12-1992 04-08-1994 20-10-1994 11-05-1988 16-01-1997 20-06-1988 22-01-1996 21-05-1992 03-10-1991 21-09-1991 30-10-1991 09-10-1990 11-12-1990 07-07-1992